



CATALOGUE

WINCHES

SUPERWINCH
BY WESTIN

CATALOGUE

WINCHES

First Edition

Publisher: Protrailer Polska

All rights reserved. Unauthorized duplication is a violation of applicable laws

© 2020 Protrailer Polska

SUPERWINCH IS BACK

After the integration of SUPERWINCH into the Westin Automotive Group (USA), the product portfolio has improved continuously.

Now Superwinch is getting stronger, better and more focused on Customer than ever.

CMPNY_ONE

cmpny one GmbH

Gewerbepark Ebbendorf 11
49176 Hilter a.T.W.
Germany

PROTRAILER

PROTRAILER Polska Sp.z o.o.

ul. Bytomska 49
42-674 Karchowice
Polen

PROTRAILER Czeska republika s.r.o.

Na Kopci 2370/48c
734 01 Karviná
Czech-Republic

BÜNTE®

Helmut BünTE GmbH

Gewerbepark Ebbendorf 11
49176 Hilter a.T.W.
Germany

BünTE Benelux B.V.

Industrieweg 9
7641 AT Wierden
Netherlands

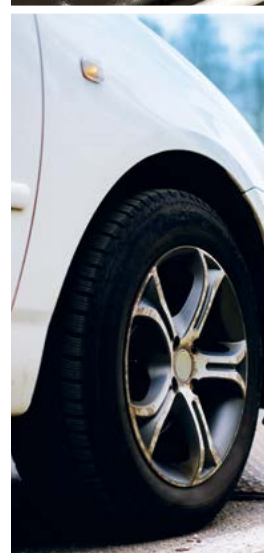
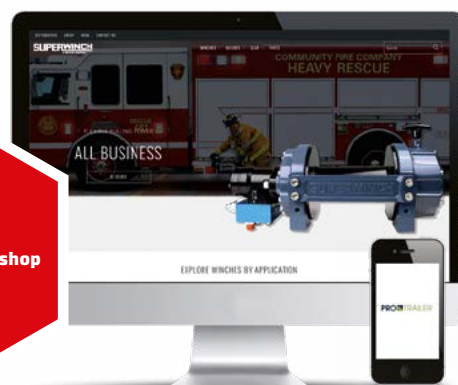




TABLE OF CONTENTS

01 TERRA SERIES	06
02 S SERIES	10
03 TIGER SHARK SERIES	13
04 TALON SERIES	17
05 HYDRAULIC WINCHES	22
06 ROPES	25
07 SPARE PARTS	29



A close-up photograph of a heavy-duty metal winch hook and cable assembly. The hook is made of thick, weathered metal and is attached to a steel cable. The cable is connected to a winch mechanism, which is part of a larger metal frame. The background is a solid red color with a white hexagonal shape containing the number '01'.

01

WINCHES
TERRA
SERIES

SUPERWINCH TERRA 25 (12 V)

P/N	62432
Max pulling force	1134 kg

Supply voltage: 12 V DC, 1,3 PS (1,0 kW)
Gearing: 3-stage planetary
Gear ratio: 140:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: wire 4,8 mm × 15,2 m, with hook
Remote: sealed Hand-Held
Installed weight: 8,2 kg
Shipping weight: 13,3 kg
Certificate: CE
Superwinch article no.: 1125220

ROPE SPEED | POWER CONSUMPTION IN A

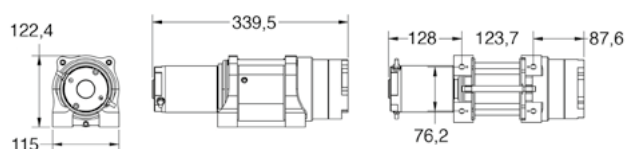
Line Pull 0 kg	7,6 m/min, 25 ampere
Line Pull 1134 kg	2,9 m/min, 162 ampere

INCLUDES

Winch
 Steel rope with hook
 Remote control pendant
 Roller fairlead (4 rolles)
 Control switch for ATV handlebars

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 various fastenings for different quad / ATV manufacturers,
 available on request

DIMENSIONS**SUPERWINCH TERRA 25 SR (12 V)**

P/N	62506
Max pulling force	1134 kg

Supply voltage: 12 V DC, 1,3 PS (1,0 kW)
Gearing: 3-stage planetary
Gear ratio: 140:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: synthetic 4,8 mm × 15,2 m, with hook
Remote: sealed Hand-Held
Installed weight: 6,8 kg
Shipping weight: 10,7 kg
Certificate: CE
Superwinch article no.: 1125230

ROPE SPEED | POWER CONSUMPTION IN A


Line Pull 0 kg	7,6 m/min, 25 ampere
Line Pull 1134 kg	2,9 m/min, 162 ampere

INCLUDES

Winch
 Synthetic rope with hook
 Remote control pendant
 Hawse fairlead
 Control switch for ATV handlebars

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 various fastenings for different quad / ATV manufacturers,
 available on request

DIMENSIONS

SUPERWINCH TERRA 35 (12 V)



P/N	62507
Max pulling force	1588 kg

Supply voltage: 12 V DC, 1,6 PS (1,2 kW)
Gearing: 3-stage planetary
Gear ratio: 140:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: wire 5,2 mm × 15,2 m, with hook
Remote: sealed Hand-Held
Installed weight: 9,1 kg
Shipping weight: 14 kg
Certificate: CE
Superwinch article no.: 1135220

ROPE SPEED | POWER CONSUMPTION IN A

Line Pull 0 kg	6,9 m/min, 19 ampere
Line Pull 1588 kg	2,8 m/min, 190 ampere


INCLUDES

Winch
Steel rope with hook
Remote control pendant
Roller fairlead (4 rolles)
Control switch for ATV handlebars

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
various fastenings for different quad / ATV manufacturers,
available on request

DIMENSIONS



SUPERWINCH TERRA 35 SR (12 V)



P/N	62508
Max pulling force	1588 kg

Supply voltage: 12 V DC, 1,6 PS (1,2 kW)
Gearing: 3-stage planetary
Gear ratio: 140:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: synthetic 4,8 mm × 15,2 m, with hook
Remote: sealed Hand-Held
Installed weight: 7,7 kg
Shipping weight: 11,4 kg
Certificate: CE
Superwinch article no.: 1135230

ROPE SPEED | POWER CONSUMPTION IN A

Line Pull 0 kg	6,9 m/min, 19 ampere
Line Pull 1588 kg	2,8 m/min, 190 ampere


INCLUDES

Winch
Synthetic rope with hook
Remote control pendant
Hawse fairlead
Control switch for ATV handlebars

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
various fastenings for different quad / ATV manufacturers,
available on request

DIMENSIONS



SUPERWINCH TERRA 45 (12 V)

P/N	62509
Max pulling force	2041 kg
Supply voltage: 12 V DC, 1,6 PS (1,2 kW)	
Gearing: 3-stage planetary	
Gear ratio: 191:1	
Clutch lever: manual	
Brake: automatic 100% Load Holding	
Rope: wire 6,5 mm × 15,2 m, with hook	
Remote: sealed Hand-Held	
Installed weight: 10,0 kg	
Shipping weight: 15,4 kg	
Certificate: CE	
Superwinch article no.: 1145220	

ROPE SPEED | POWER CONSUMPTION IN A

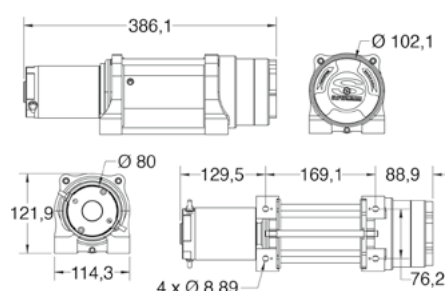
Line Pull 0 kg	4,6 m/min, 21 ampere
Line Pull 2041 kg	1,7 m/min, 178 ampere

INCLUDES

Winch
 Steel rope with hook
 Remote control pendant
 Roller fairlead (4 rolles)
 Control switch for ATV handlebars

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 various fastenings for different quad / ATV manufacturers,
 available on request

DIMENSIONS**SUPERWINCH TERRA 45 SR (12 V)**

P/N	62510
Max pulling force	2041 kg
Supply voltage: 12 V DC, 1,6 PS (1,2 kW)	
Gearing: 3-stage planetary	
Gear ratio: 191:1	
Clutch lever: manual	
Brake: automatic 100% Load Holding	
Rope: synthetic 6,5 mm × 15,2 m, with hook	
Remote: sealed Hand-Held	
Installed weight: 8,6 kg	
Shipping weight: 12,7 kg	
Certificate: CE	
Superwinch article no.: 1145230	

ROPE SPEED | POWER CONSUMPTION IN A

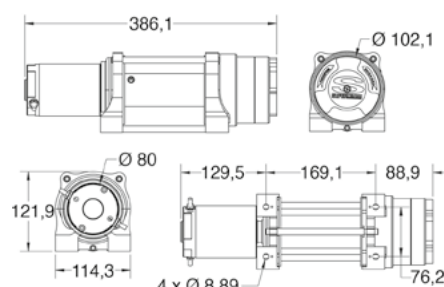
Line Pull 0 kg	4,6 m/min, 21 ampere
Line Pull 2041 kg	1,7 m/min, 178 ampere

INCLUDES

Winch
 Synthetic rope with hook
 Remote control pendant
 Hawse fairlead
 Control switch for ATV handlebars

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 various fastenings for different quad / ATV manufacturers,
 available on request

DIMENSIONS



02

WINCHES
S-SERIES

SUPERWINCH S5500 (12 V)

P/N	62752
------------	--------------

Max pulling force	2494 kg
--------------------------	----------------

Supply voltage: 12 V DC, 2,1 PS (1,57 kW)

Gearing: 1-stage planetary

Gear ratio: 159:1

Clutch lever: manual

Brake: automatic 100% Load Holding

Rope: wire 6,4 mm × 12,2 m, with hook

Remote: sealed Hand-Held

Installed weight: 14,51 kg

Shipping weight: 18,14 kg

Certificate: CE

Superwinch article no.: 1455200

ROPE SPEED | POWER CONSUMPTION IN A

Line Pull 0 kg	6,5 m/min, 40 ampere
-----------------------	----------------------

Line Pull 2494 kg	3,2 m/min, 350 ampere
--------------------------	-----------------------

INCLUDES

Winch

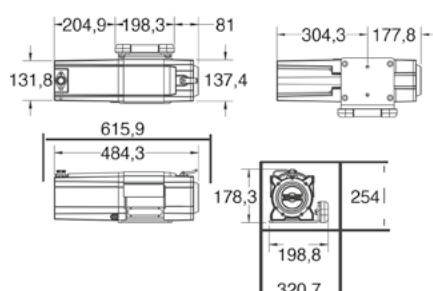
Steel rope with hook

Remote control pendant

Roller fairlead (2 rolles, stainless steel)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199

DIMENSIONS**SUPERWINCH S5500 SR (12 V)**

P/N	64061
------------	--------------

Max pulling force	2494 kg
--------------------------	----------------

Supply voltage: 12 V DC, 2,1 PS (1,57 kW)

Gearing: 1-stage planetary

Gear ratio: 159:1

Clutch lever: manual

Brake: automatic 100% Load Holding

Rope: synthetic 6,4 mm × 12,2 m, with hook

Remote: sealed Hand-Held

Installed weight: 14,51 kg

Shipping weight: 18,14 kg

Certificate: CE

Superwinch article no.: 1455201

ROPE SPEED | POWER CONSUMPTION IN A

Line Pull 0 kg	6,5 m/min, 40 ampere
-----------------------	----------------------

Line Pull 2494 kg	3,2 m/min, 350 ampere
--------------------------	-----------------------

INCLUDES

Winch

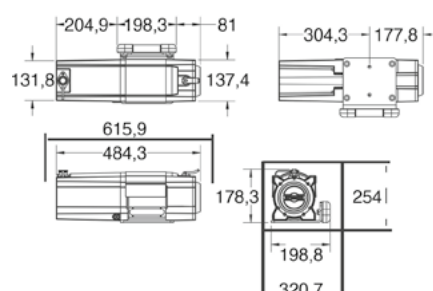
Synthetic rope with hook

Remote control pendant

Roller fairlead (2 rolles, stainless steel)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199

DIMENSIONS

SUPERWINCH S7500 (12 V)



P/N	62753
Max pulling force	3401 kg

Supply voltage: 12 V DC, 2,1 PS (1,57 kW)
Gearing: 1-stage planetary
Gear ratio: 159:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: wire 6,4 mm × 12,2 m, with hook
Remote: sealed Hand-Held
Installed weight: 14,51 kg
Shipping weight: 18,14 kg
Certificate: CE
Superwinch article no.: 1475200

ROPE SPEED | POWER CONSUMPTION IN A

Line Pull 0 kg	6,5 m/min, 40 ampere
Line Pull 3401 kg	3,2 m/min, 350 ampere

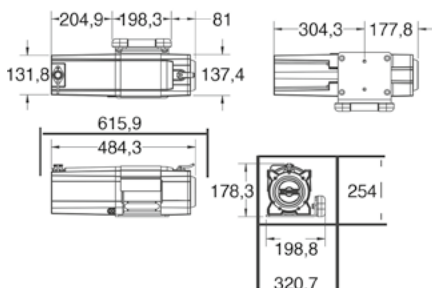
INCLUDES

Winch
Steel rope with hook
Remote control pendant
Roller fairlead (2 rolles, stainless steel)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 64084
Cover for winch, P/N 64092
Mounting plate, P/N 64087

DIMENSIONS



SUPERWINCH S7500 SR (12 V)



P/N	64062
Max pulling force	3401 kg

Supply voltage: 12 V DC, 2,1 PS (1,57 kW)
Gearing: 1-stage planetary
Gear ratio: 159:1
Dźwignia sprzęgła: manual
Brake: automatic 100% Load Holding
Rope: synthetic 6,4 mm × 12,2 m, with hook
Remote: sealed Hand-Held
Installed weight: 10,40 kg
Shipping weight: 14,51 kg
Certificate: CE
Superwinch article no.: 1475201

ROPE SPEED | POWER CONSUMPTION IN A

Line Pull 0 kg	6,5 m/min, 40 ampere
Line Pull 3401 kg	3,2 m/min, 350 ampere

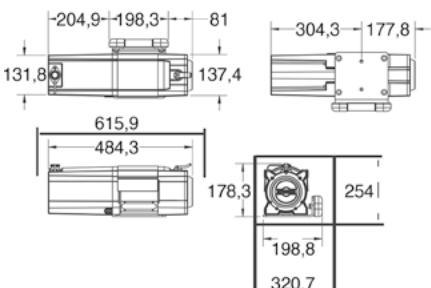
INCLUDES

Winch
Synthetic rope with hook
Remote control pendant
Roller fairlead (2 rolles, stainless steel)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 64084
Cover for winch, P/N 64092
Mounting plate, P/N 64087

DIMENSIONS





03

WINCHES

TIGERSHARK
SERIES

SUPERWINCH TIGERSHARK 9500 (12 V)

P/N	62431
Max pulling force	4309 kg

Supply voltage: 12 V DC, 5,2 PS (3,8 kW)
Gearing: 3-stage planetary
Gear ratio: 218:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: wire 8,3 mm × 29 m, with hook
Remote: sealed Hand-Held
Installed weight: 41 kg
Shipping weight: 42 kg
Certificate: CE
Superwinch article no.: 1595200

ROPE SPEED | POWER CONSUMPTION IN A

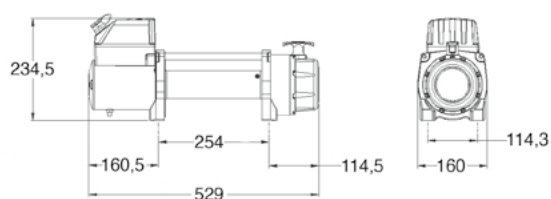
Line Pull 0 kg	5,7 m/min, 80 ampere
Line Pull 4309 kg	1,2 m/min, 340 ampere

INCLUDES

Winch
 Steel rope with hook
 Remote control pendant
 Roller fairlead (4 rolles)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 Neoprene winch cover, P/N 68720
 Mounting plate, P/N 62601

DIMENSIONS**SUPERWINCH TIGERSHARK 9500 SR (12 V)**

P/N	62487
Max pulling force	4309 kg

Supply voltage: 12 V DC, 5,2 PS (3,8 kW)
Gearing: 3-stage planetary
Gear ratio: 218:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: synthetic 8,3 mm × 29 m, with hook
Remote: sealed Hand-Held
Installed weight: 31 kg
Shipping weight: 32 kg
Certificate: CE
Superwinch article no.: 1595201

ROPE SPEED | POWER CONSUMPTION IN A

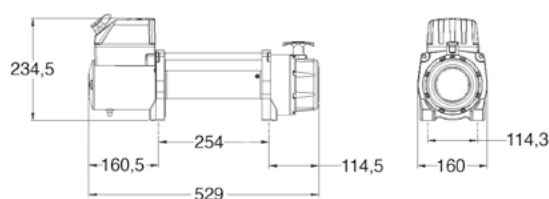
Line Pull 0 kg	5,7 m/min, 80 ampere
Line Pull 4309 kg	1,2 m/min, 340 ampere

INCLUDES

Winch
 Synthetic rope with hook
 Remote control pendant
 Hawse fairlead

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 Neoprene winch cover, P/N 68720
 Mounting plate, P/N 62601

DIMENSIONS

SUPERWINCH TIGERSHARK 11500 (12 V)

P/N	62488
Max pulling force	5215 kg

Supply voltage: 12 V DC, 6 PS (4,44 kW)
Gearing: 3-stage planetary
Gear ratio: 218:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: wire 9,5 mm × 26 m, with hook
Remote: sealed Hand-Held
Installed weight: 42 kg
Shipping weight: 44 kg
Certificate: CE
Superwinch article no.: 1511200

ROPE SPEED | POWER CONSUMPTION IN A

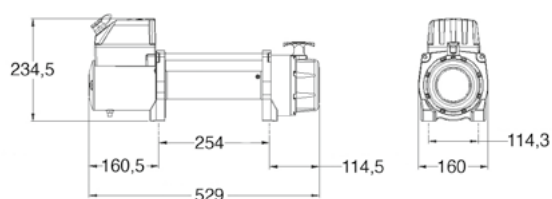
Line Pull 0 kg	5,7 m/min, 80 ampere
Line Pull 5215 kg	1,2 m/min, 340 ampere

INCLUDES

Winch
 Synthetic rope with hook
 Remote control pendant
 Roller fairlead (4 roles)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 Neoprene winch cover, P/N 68720
 Mounting plate, P/N 62601

DIMENSIONS**SUPERWINCH TIGERSHARK 11500 SR (12 V)**

P/N	62489
Max pulling force	5215 kg

Supply voltage: 12 V DC, 6 PS (4,44 kW)
Gearing: 3-stage planetary
Gear ratio: 218:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: synthetic 8,3 mm × 29 m, with hook
Remote: sealed Hand-Held
Installed weight: 32 kg
Shipping weight: 33 kg
Certificate: CE
Superwinch article no.: 1511201

ROPE SPEED | POWER CONSUMPTION IN A

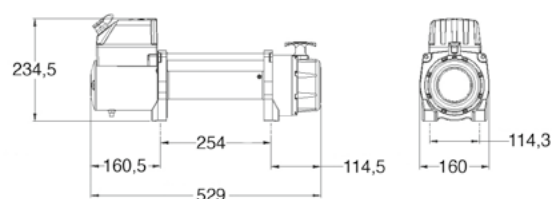
Line Pull 0 kg	5,7 m/min, 80 ampere
Line Pull 5215 kg	0,6 m/min, 340 ampere

INCLUDES

Winch
 Synthetic rope with hook
 Remote control pendant
 Hawse fairlead

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 Neoprene winch cover, P/N 68720
 Mounting plate, P/N 62601

DIMENSIONS

SUPERWINCH TIGERSHARK 13500 (12 V)

P/N	62490
------------	--------------

Max pulling force	6123 kg
--------------------------	----------------

Supply voltage: 12 V DC, 5,3 PS (3,95 kW)

Gearing: 4-stage planetary

Gear ratio: 518:1

Clutch lever: manual

Brake: automatic 100% Load Holding

Rope: wire 10,3 mm × 29 m, with hook

Remote: sealed Hand-Held

Installed weight: 60,7 kg

Shipping weight: 62,5 kg

Certificate: CE

Superwinch article no.: 1513200

ROPE SPEED | POWER CONSUMPTION IN A

Line Pull 0 kg	3,4 m/min, 120 ampere
-----------------------	-----------------------

Line Pull 6123 kg	1,2 m/min, 440 ampere
--------------------------	-----------------------

INCLUDES

Winch

Steel rope with hook

Remote control pendant

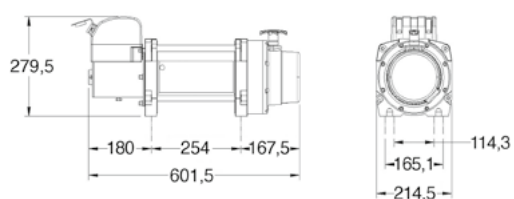
Roller fairlead (4 rolles)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199

Neoprene winch cover, P/N 62757

Mounting plate, P/N 62611

DIMENSIONS



04

WINCHES

TALON
SERIES

SUPERWINCH TALON 9.5 (12 V)

P/N	62452
Max pulling force	4309 kg

Supply voltage: 12 V DC, 5,2 PS (3,8 kW)
Gearing: 2-stage planetary
Gear ratio: 148:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: wire 9,5 mm × 26 m, with hook
Remote: sealed Hand-Held
Installed weight: 41 kg
Shipping weight: 47 kg
Certificate: CE
Superwinch article no.: 1695200

ROPE SPEED | POWER CONSUMPTION IN A

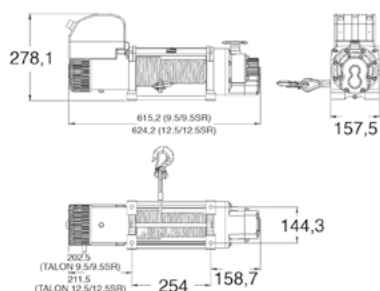
Line Pull 0 kg	18,9 m/min, 75 ampere
Line Pull 4309 kg	1,5 m/min, 430 ampere

INCLUDES

Winch
 Steel rope with hook
 Remote control pendant
 Roller fairlead (4 rolles)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 Mounting plate, P/N 62601
 Neoprene winch cover, P/N 68720

DIMENSIONS**SUPERWINCH TALON 9.5 SR (12 V)**

P/N	62453
Max pulling force	4309 kg

Supply voltage: 12 V DC, 5,2 PS (3,8 kW)
Gearing: 2-stage planetary
Gear ratio: 148:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: synthetic 9,5 mm × 26 m, with hook
Remote: sealed Hand-Held
Installed weight: 30 kg
Shipping weight: 35 kg
Certificate: CE
Superwinch article no.: 1695201

ROPE SPEED | POWER CONSUMPTION IN A

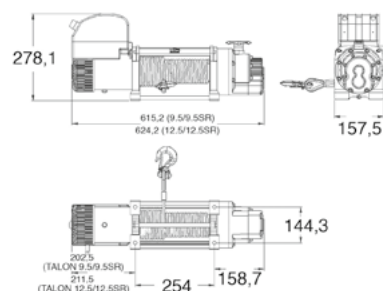
Line Pull 0 kg	18,9 m/min, 75 ampere
Line Pull 4309 kg	1,5 m/min, 430 ampere

INCLUDES

Winch
 Synthetic rope with hook
 Remote control pendant
 Hawse fairlead

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 Mounting plate, P/N 62601
 Neoprene winch cover, P/N 68720

DIMENSIONS

SUPERWINCH TALON 9.5 (24 V)

P/N	62534
Max pulling force	4309 kg

Supply voltage: 24 V DC, 5,2 PS (3,8 kW)
Gearing: 2-stage planetary
Gear ratio: 148:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: wire 9,5 mm × 26 m, with hook
Remote: sealed Hand-Held
Installed weight: 41 kg
Shipping weight: 47 kg
Certificate: CE
Superwinch article no.: 1695300

ROPE SPEED | POWER CONSUMPTION IN A

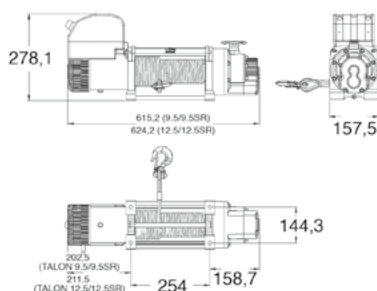
Line Pull 0 kg	18,9 m/min, 75 ampere
Line Pull 4309 kg	1,5 m/min, 430 ampere

INCLUDES

Winch
 Steel rope with hook
 Remote control pendant
 Roller fairlead (4 rolles)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 Mounting plate, P/N 62601
 Neoprene winch cover, P/N 68720

DIMENSIONS**SUPERWINCH TALON 12.5 (12 V)**

P/N	62456
Max pulling force	5670 kg

Supply voltage: 12 V DC, 6 PS (4,44 kW)
Gearing: 2-stage planetary
Gear ratio: 148:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: wire 9,5 mm × 26 m, with hook
Remote: sealed Hand-Held
Installed weight: 43 kg
Shipping weight: 48 kg
Certificate: CE
Superwinch article no.: 1612200

ROPE SPEED | POWER CONSUMPTION IN A

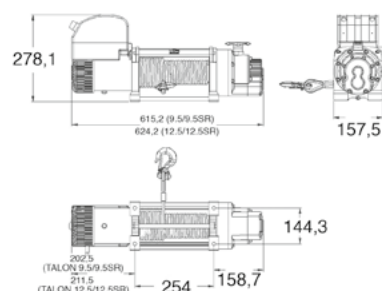
Line Pull 0 kg	18,9 m/min, 75 ampere
Line Pull 5670 kg	0,99 m/min, 530 ampere

INCLUDES

Winch
 Steel rope with hook
 Remote control pendant
 Roller fairlead (4 rolles)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 Mounting plate, P/N 62601
 Neoprene winch cover, P/N 68720

DIMENSIONS

SUPERWINCH TALON 12.5 SR (12 V)

P/N	62457
Max pulling force	5670 kg

Supply voltage: 12 V DC, 6 PS (4,44 kW)
Gearing: 2-stage planetary
Gear ratio: 148:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: wire 9,5 mm × 24,4 m, with hook
Remote: sealed Hand-Held
Installed weight: 31 kg
Shipping weight: 37 kg
Certificate: CE
Superwinch article no.: 1612201

ROPE SPEED | POWER CONSUMPTION IN A

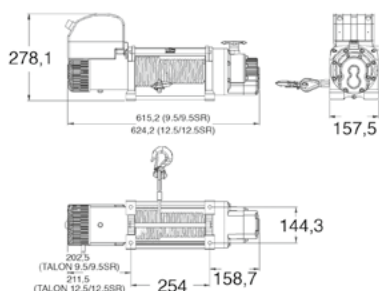
Line Pull 0 kg	18,9 m/min, 75 ampere
Line Pull 5670 kg	0,99 m/min, 530 ampere

INCLUDES

Winch
 Synthetic rope with hook
 Remote control pendant
 Hawse fairlead

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 Mounting plate, P/N 62601
 Neoprene winch cover, P/N 68720

DIMENSIONS**SUPERWINCH TALON 12.5 (24 V)**

P/N	62540
Max pulling force	5670 kg

Supply voltage: 24 V DC, 6 PS (4,44 kW)
Gearing: 2-stage planetary
Gear ratio: 148:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Rope: wire 9,5 mm × 26 m, with hook
Remote: sealed Hand-Held
Installed weight: 43 kg
Shipping weight: 48 kg
Certificate: CE
Superwinch article no.: 1612300

ROPE SPEED | POWER CONSUMPTION IN A

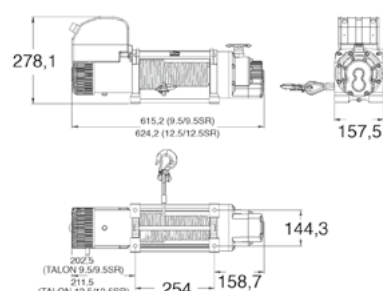
Line Pull 0 kg	18,9 m/min, 75 ampere
Line Pull 5670 kg	0,99 m/min, 530 ampere

INCLUDES

Winch
 Steel rope with hook
 Remote control pendant
 Roller fairlead (4 rolles)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199
 Mounting plate, P/N 62601
 Neoprene winch cover, P/N 68720

DIMENSIONS

SUPERWINCH TALON 18 (24 V)

P/N	62549
------------	--------------

Max pulling force	8165 kg
--------------------------	----------------

Supply voltage: 24 V DC, 6 PS (4,44 kW)**Gearing:** 2-stage planetary**Gear ratio:** 346:1**Clutch lever:** manual**Brake:** automatic 100% Load Holding**Rope:** wire 13 mm × 27,43 m, with hook**Remote:** sealed Hand-Held**Installed weight:** 78 kg**Shipping weight:** 83,9 kg**Certificate:** CE**Superwinch article no.:** 1618300**ROPE SPEED | POWER CONSUMPTION IN A**

Line Pull 0 kg	7,62 m/min, 75 ampere
-----------------------	-----------------------

Line Pull 8165 kg	0,76 m/min, 415 ampere
--------------------------	------------------------

INCLUDES

Winch

Steel rope with hook

Remote control pendant

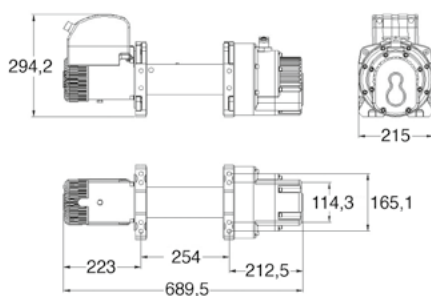
Roller fairlead (4 rolles)

RECOMMENDED ACCESSORIES

Wireless remote control, P/N 63459 or 72199

Mounting plate, P/N 62611

Neoprene winch cover, P/N 62747

DIMENSIONS



05

HYDRAULIC

WINCHES

SUPERWINCH H8P PRO

P/N	62518
Max pulling force	3629 kg

Supply voltage: hydraulic
Gearing: 2-stage planetary
Gear ratio: 16:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Oil pressure: 150 bar
Oil flow: 60 l/min.
Installed weight: 40 kg
Shipping weight: 43,73 kg
Certificate: CE, EN-14492-1
Superwinch article no.: 5050PRO

POWER

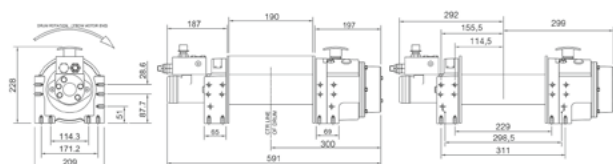
Line Pull o kg	14,7 m/min.
-----------------------	-------------

INCLUDES

Winch
 Hydraulic clutch
 Transport packaging

RECOMMENDED ACCESSORIES

Steel rope 10 mm × 27 m, with hook, P/N 62622
 Roller fairlead, P/N 62596
 Rope tensioner, P/N 62597
 Pneumatic clutch, P/N 62600
 Mounting plate, P/N 62601

DIMENSIONS**SUPERWINCH H8P PRO LONG**

P/N	62528
Max pulling force	3629 kg

Supply voltage: hydraulic
Gearing: 2-stage planetary
Gear ratio: 16:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Oil pressure: 150 bar
Oil flow: 60 l/min.
Installed weight: 41 kg
Shipping weight: 44,73 kg
Certificate: CE, EN-14492-1
Superwinch article no.: 5060PRO

POWER

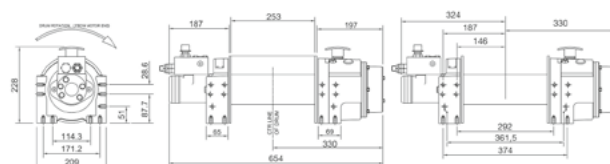
Line Pull o kg	14,7 m/min.
-----------------------	-------------

INCLUDES

Winch
 Hydraulic clutch
 Transport packaging

RECOMMENDED ACCESSORIES

Steel rope 10 mm × 27 m, with hook, P/N 62622
 Roller fairlead, P/N 62598
 Rope tensioner, P/N 62599
 Pneumatic clutch, P/N 62600
 Mounting plate, P/N 62601

DIMENSIONS

SUPERWINCH H10P PRO

P/N	62520
Max pulling force	4300 kg

Supply voltage: hydraulic
Gearing: 2-stage planetary
Gear ratio: 16:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Oil pressure: 120 bar
Oil flow: 60 l/min.
Installed weight: 40 kg
Shipping weight: 43,73 kg
Certificate: CE, EN-14492-1
Superwinch article no.: 5170PRO

POWER

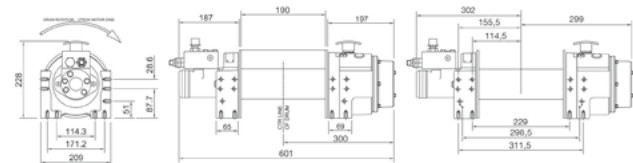
Line Pull o kg	10 m/min.
-----------------------	-----------

INCLUDES

Winch
 Hydraulic clutch
 Transport packaging

RECOMMENDED ACCESSORIES

Steel rope 11 mm × 20 m, with hook, P/N 62624
 Roller fairlead, P/N 62596
 Rope tensioner, P/N 62597
 Pneumatic clutch, P/N 62600
 Mounting plate, P/N 62601

DIMENSIONS**SUPERWINCH H10P PRO LANG**

P/N	62570
Max pulling force	4300 kg

Supply voltage: hydraulic
Gearing: 2-stage planetary
Gear ratio: 16:1
Clutch lever: manual
Brake: automatic 100% Load Holding
Oil pressure: 120 bar
Oil flow: 60 l/min.
Installed weight: 41 kg
Shipping weight: 44,73 kg
Certificate: CE, EN-14492-1
Superwinch article no.: 5172PRO

POWER

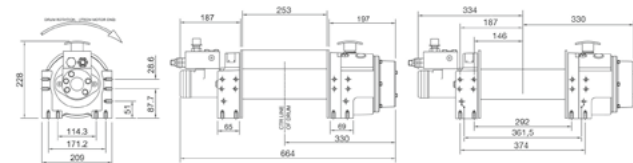
Line Pull o kg	10 m/min.
-----------------------	-----------

INCLUDES

Winch
 Hydraulic clutch
 Transport packaging

RECOMMENDED ACCESSORIES

Steel rope 11 mm × 26 m, with hook, P/N 62625
 Roller fairlead, P/N 62598
 Rope tensioner, P/N 62599
 Pneumatic clutch, P/N 62600
 Mounting plate, P/N 62601

DIMENSIONS



06

ROPES

STEEL ROPES



Steel rope 5 mm × 13,7 m, with hook	P/N 70059
Steel rope 6 mm × 15 m, with hook	P/N 70060
Steel rope 8,3 mm × 21 m, with hook	P/N 70061
Steel rope 8,3 mm × 28 m, with hook	P/N 69010
Steel rope 9 mm × 35 m, with hook	P/N 70063
Steel rope 9,5 mm × 26 m, with hook	P/N 62478
Steel rope 10,3 mm × 29 m, with hook	P/N 62500
Steel rope 11,5 mm × 28 m, with hook	P/N 62501
Steel rope 10 mm × 23 m, with hook	P/N 62603
Steel rope 10 mm × 30 m, with hook	P/N 62604
Steel rope 13 mm × 50 m, with hook	P/N 62614
Steel rope 20 mm × 50 m, with hook	P/N 62615
Steel rope 11 mm × 50 m, with hook	P/N 62625
Steel rope 8 mm × 23 m, with hook	P/N 62645
Steel rope 6 mm × 15,2 m, with hook	P/N 62699
Steel rope 13 mm × 30 m, with hook	P/N 64209
Steel rope 14 mm × 30 m, with hook	P/N 70064
Steel rope 14 mm × 62 m, with hook	P/N 70075
Steel rope 16 mm × 40 m, with hook	P/N 70066
Steel rope 18 mm × 52 m, with hook	P/N 70068
Steel rope 22 mm × 34 m, with hook	P/N 70067
Steel rope 13 mm × 25 m, with hook	P/N 70062

SYNTHETIC ROPES



Synthetic rope 13mm x 25m	P/N 72180
Synthetic rope a 9,5 mm x 26m	P/N 72181
Synthetic rope 6 mm x 15m	P/N 72182
Synthetic rope 5mm x 13,7m	P/N 72183

SNATCH BLOCKS



Snatch block for 44.5kN	P/N 62482
Snatch block fo 89kN	P/N 72193
Snatch block fo133.5kN	P/N 72194

MOUNTS



Mounts for hydraulic winches 35.6kN- 44.5kN, for electric winches 35.5kN- 80.1kN	P/N 62601
Mounts for hydraulic winches 66.8kN- 80.1kN	P/N 62611

HOOKS



Hook for steel rope 9,5 mm	P/N 62479
Hook for steel rope 10 mm	P/N 62480
Hook for steel rope 13 mm	P/N 62481
Hook for synthetic rope 9,5 mm	P/N 62485

CONTROLS



Winch remote control
for electric winches

P/N 63438



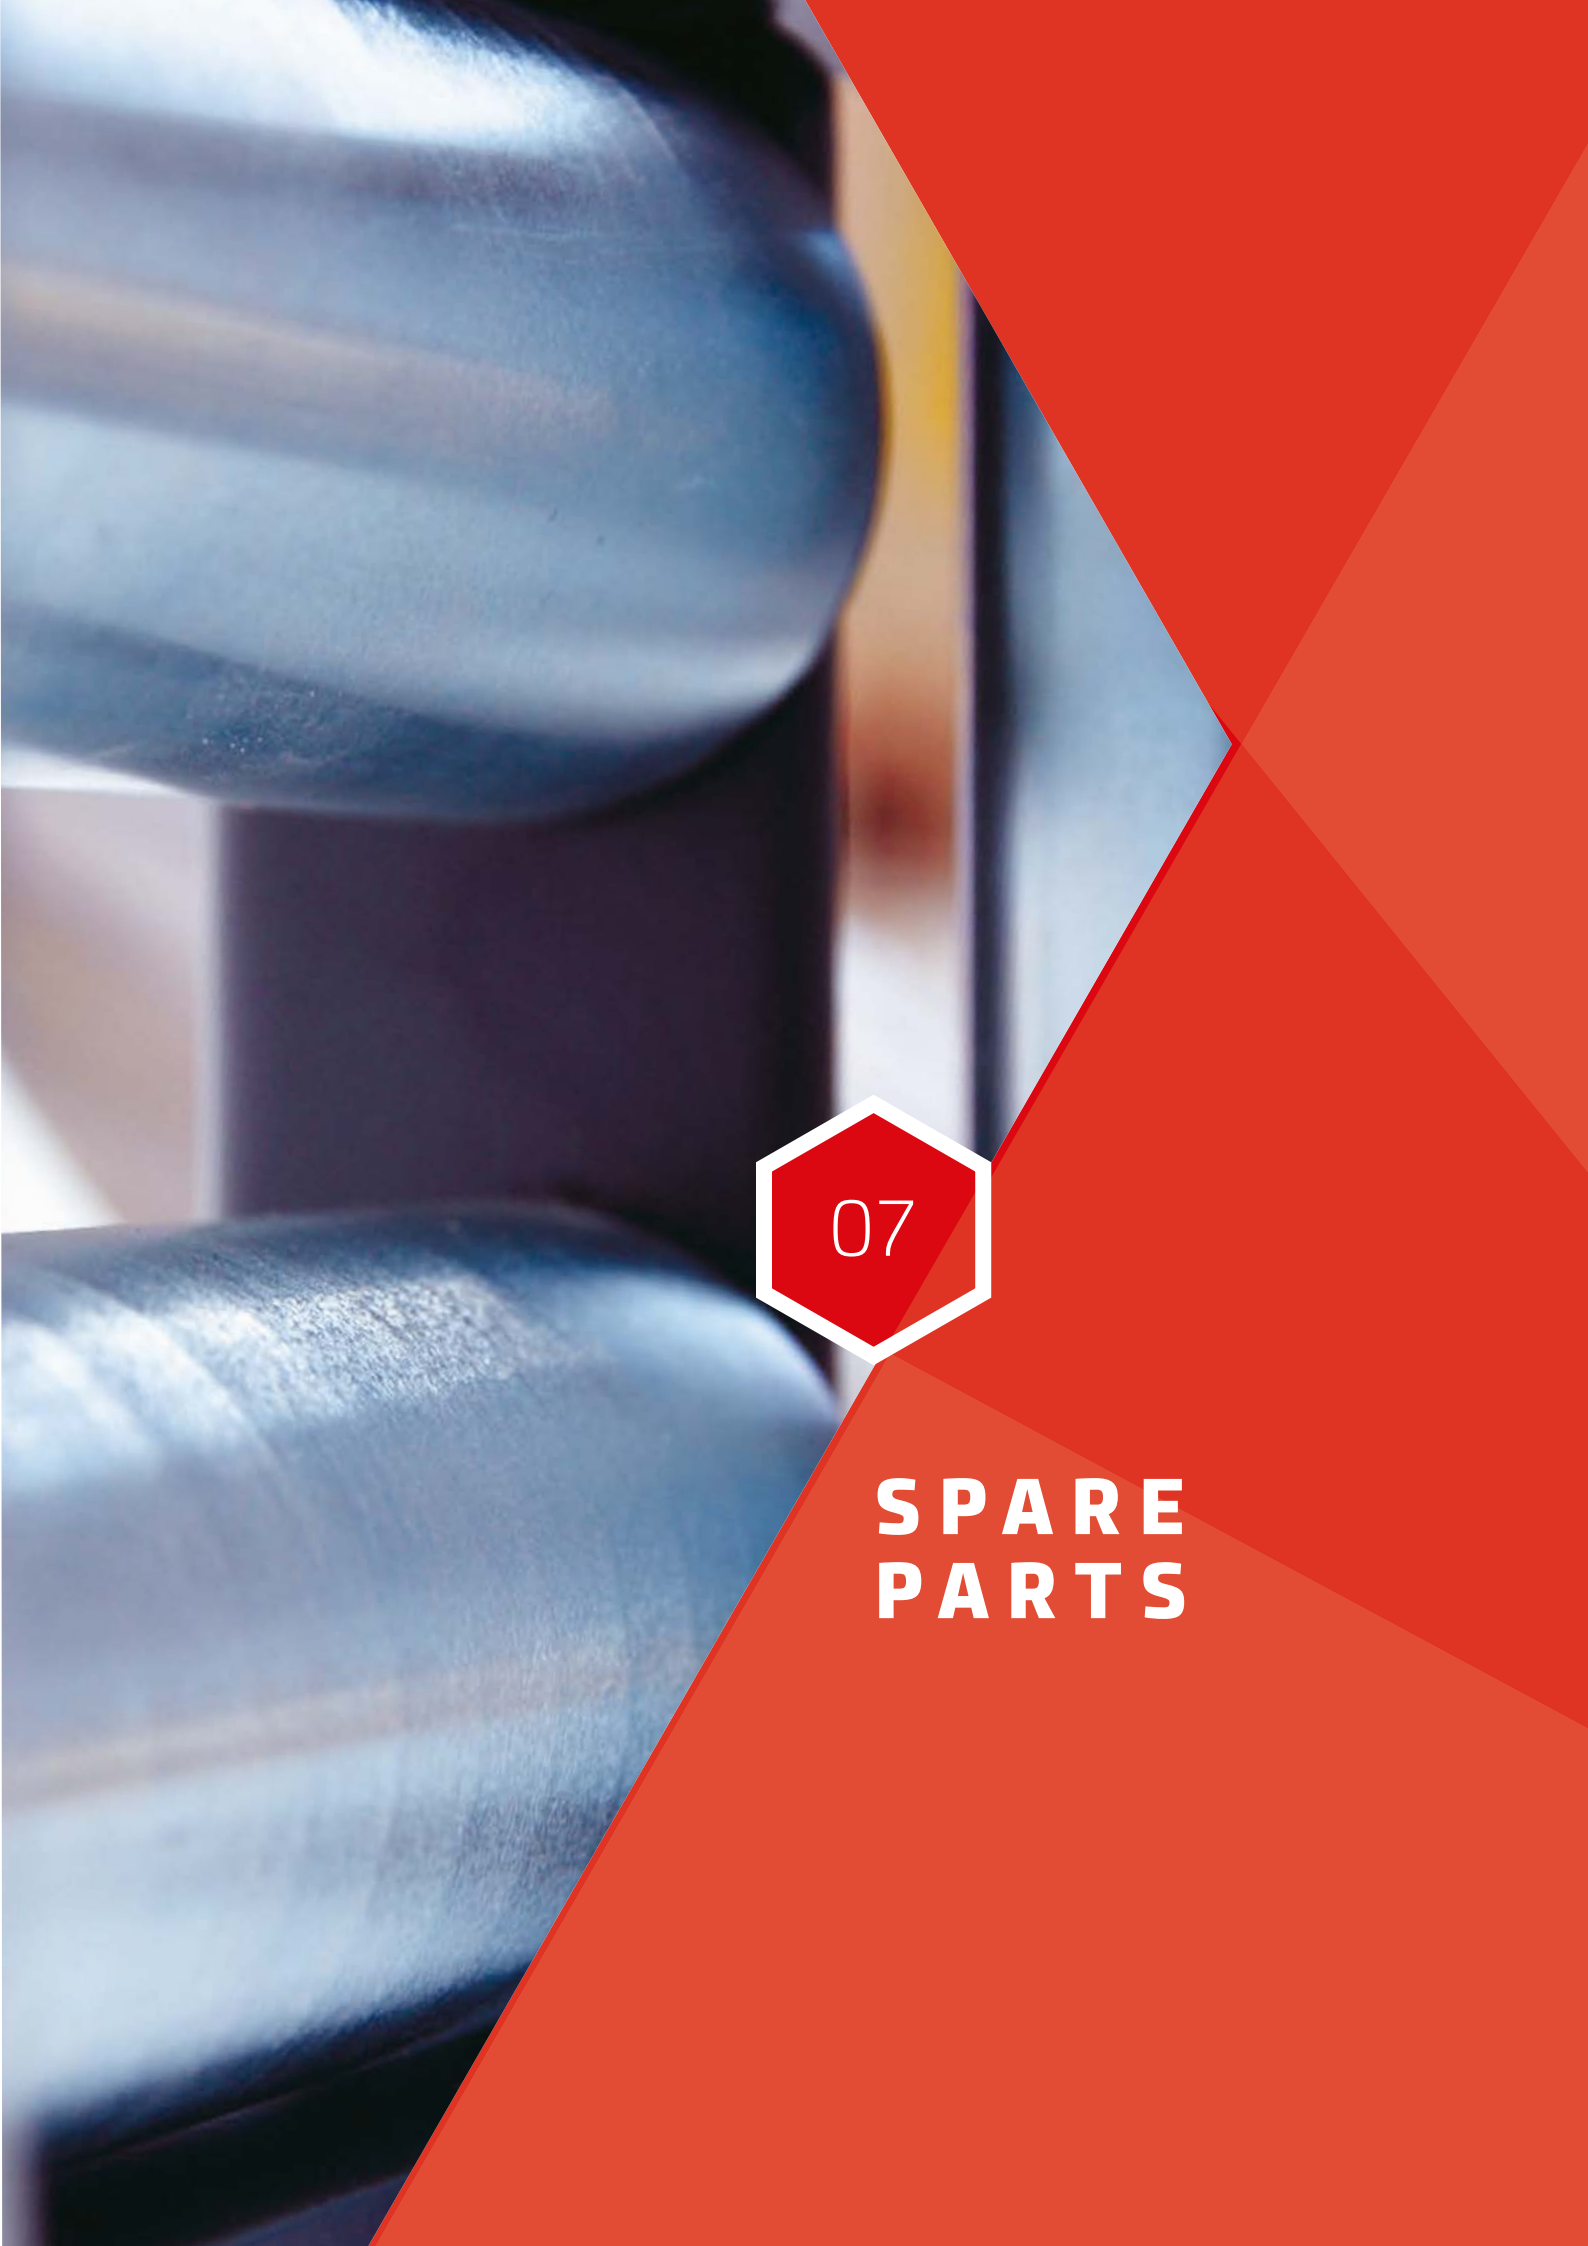
Winch remote control
in blue casing for electric winches

P/N 63459



Remote control 12- 24V,
4 function, for electric winches

P/N 72199



07

**SPARE
PARTS**

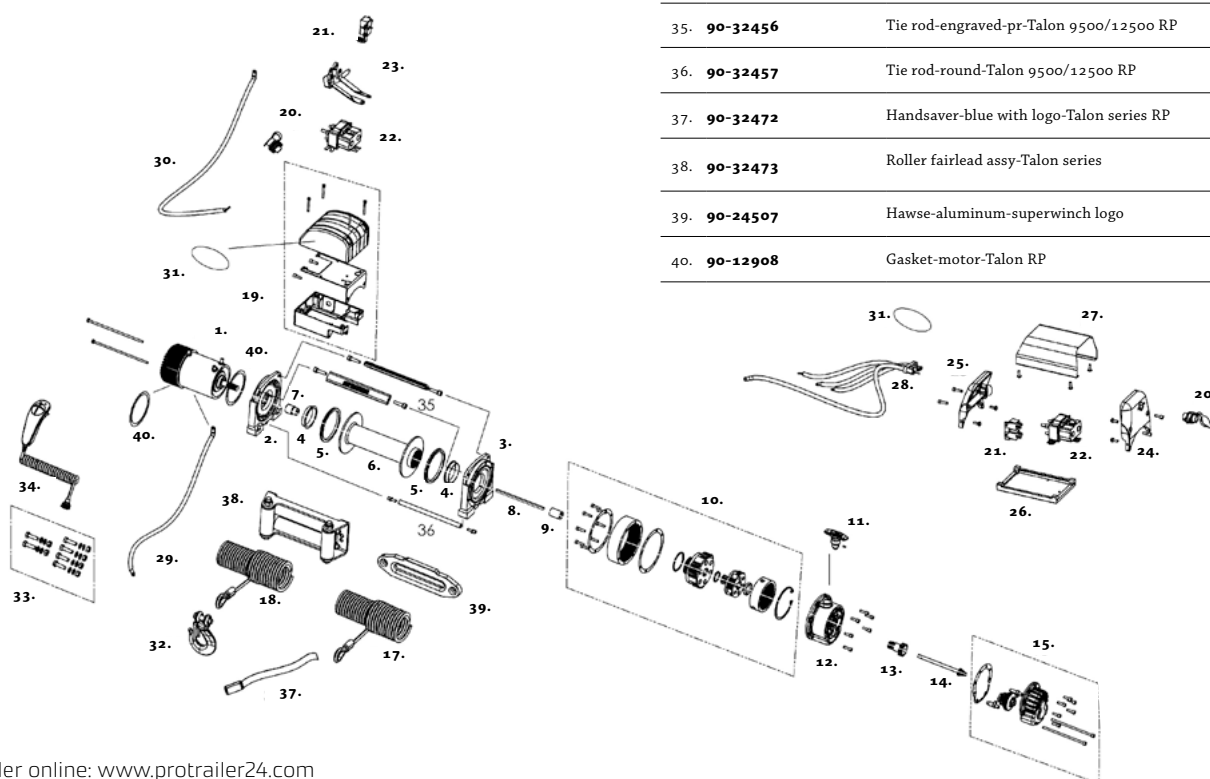
TERRA 25			Terra 35			TERRA 45		
1.	87-42601	Motor-Terra 25-RP	1.	87-42602	Motor-Terra 35-RP	1.	87-42601	Motor-Terra 45-rp
2.	87-42604	Drum-Terra 25/35-RP	2.	87-42604	Drum-Terra 25/35-RP	2.	87-42603	Drum-Terra 45-rp
3.	87-42606	Gearbox-assy Terra 25/35-RP	3.	87-42606	Gearbox-assy Terra 25/35-RP	3.	87-42605	Gearbox-assy Terra 45-rp
4.	87-42615	Assy-clevis hook-Terra -RP	4.	87-42615	Assy-clevis hook-Terra -RP	4.	87-42615	Assy-clevis hook-Terra -RP
5.	87-42617	Leadwire-kit-Terra-RP	5.	87-42617	Leadwire-kit-Terra-RP	5.	87-42617	Leadwire-kit-Terra-RP
6.	87-42618	Socket-Terra-RP	6.	87-42618	Socket-Terra-RP	6.	87-42618	Socket-Terra-RP
7.	87-22873-16	Circuit breaker assy-100a 12v	7.	87-22873-16	Circuit breaker assy-100a 12v	7.	87-22873-16	Circuit breaker assy-100a 12v
8.	87-42608	Solenoid-Terra-RP	8.	87-42608	Solenoid-Terra-RP	8.	87-42608	Solenoid-Terra-RP
9.	87-42609	Switch-rocker-Terra-RP	9.	87-42609	Switch-rocker-Terra-RP	9.	87-42609	Switch-rocker-Terra-RP
10.	87-42616	Mount kit-hardware-Terra-RP	10.	87-42616	Mount kit-hardware-Terra-RP	10.	87-42616	Mount kit-hardware-Terra-RP
11.	87-42610	Switch-hand held rocker-Terra-RP	11.	87-42610	Switch-hand held rocker-Terra-RP	11.	87-42610	Switch-hand held rocker-Terra-RP
12.	87-42634	Circuit breaker assy-cover-inline	12.	87-42634	Circuit breaker assy-cover-inline	12.	87-42634	Circuit breaker assy-cover-inline
TERRA 25 VERSION STEEL ROPE			TERRA 35 VERSION STEEL ROPE			TERRA 45 VERSION STEEL ROPE		
13.	1511F	Wire rope assy 3/16 x 50 no HK	13.	87-42611	Wire rope assy-Terra 35-RP	13.	87-42612	Wire rope assy-Terra 45-RP
14.	87-41340-01	Roller fairlead Terra 25/35	14.	87-41340-01	Roller fairlead Terra 25/35	14.	87-41340	Roller fairlead Terra 45
TERRA 25 VERSION SYNTHETIC ROPE			TERRA 35 VERSION SYNTHETIC ROPE			TERRA 45 VERSION SYNTHETIC ROPE		
15.	87-42613	Synthetic rope Terra 25/35	15.	87-42613	Synthetic rope Terra 25/35	15.	87-42614	Synthetic rope Terra 45
16.	87-42619	Hawse fairlead for rope Terra 25/35	16.	87-42619	Hawse fairlead for rope Terra 25/35	16.	87-42620	Hawse fairlead for rope Terra 45



TALON 9.5-12.5

	90-41409	Motor-Talon 9.5 14 12v
	90-41410	Motor-Talon 9.5 14 24v
1.	90-41411	Motor-Talon 12.5 18 12v
	90-41412	Motor-Talon 12.5 18 24v
	90-24590	Brush assy-12v Talon mtr non-n
	90-24591	Brush assy-24v Talon mtr/12v begin w/n
2.	90-41414	Drum support-motor-Talon 9500/12500 RP
3.	90-41415	Drum support-gearbox-Talon 9500/12500 RP
4.	90-24542	Drum bushing-pair-Talon 9500/12500
5.	90-24543	Lip seal-drum-pair-Talon 9500/12500
6.	90-41416	Drum assy-Talon 9500/12500 RP
7.	90-24544	Coupling-ds-motor-Talon 9500/12500
8.	90-24545	Driveshaft-Talon 9500/12500 RP
9.	90-24546	Coupling-ds-gbox-Talon 9500/12500
10.	90-41417	Gearbox-internal-Talon 9500/12500 RP
11.	90-24547	Freespool knob assy-Talon 9500/12500
12.	90-41418	Gearbox housing assy-Talon 9500/12500 RP
13.	90-24548	Shaft-sun-stage2-Talon 9500/12500 RP
14.	90-24549	Shaft-sun-stage1-Talon 9500/12500 RP
15.	90-32458	Brake assembly-Talon 9500/12500 RP
16.	90-12897	Screw-set-wire rope-Talon RP
17.	90-24550	Wire rope assy-Talon 9500/12500 RP
18.	90-24506	Assy-synthetic winch rope
19.	90-41419	Solenoid box assy-Talon series RP

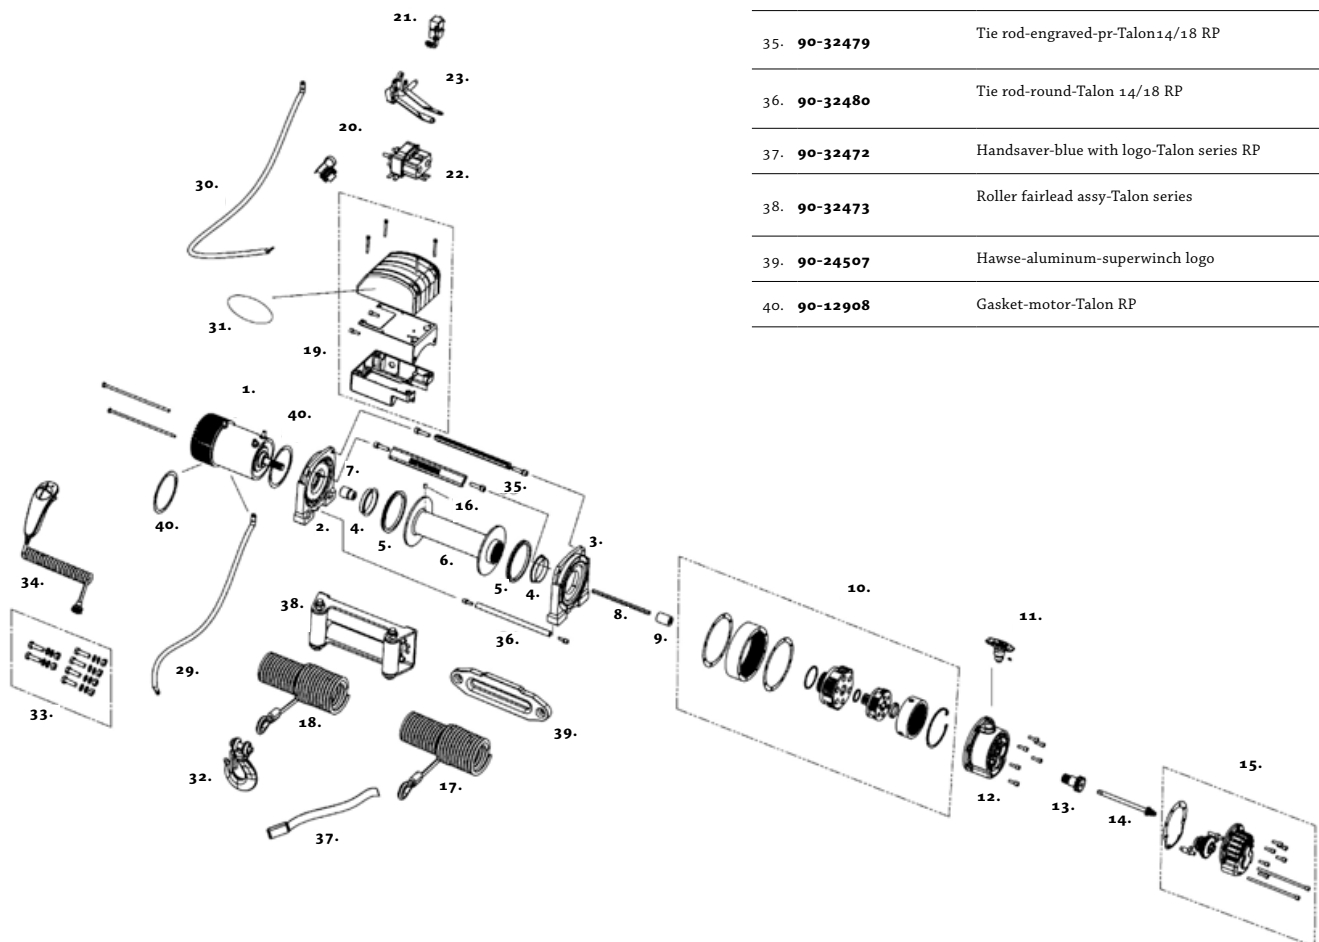
20.	90-24551	Socket assy-Talon winches RP
	90-24552	Relay assy-dual-12v-Talon series RP
21.	90-24566	Relay assy-dual-Talon 9500/12500 24
	90-32459	Solenoid assembly-Talon series 12v RP
22.	90-32483	Solenoid assembly-Talon series 24
23.	90-32460	Buss bars-set-Talon series RP
24.	90-32461	Casting-bridge-gb side-Talon RP
25.	90-32462	Casting-bridge-motor side-Talon RP
26.	90-41420	Baseplate-bridge-Talon 9500i/12500i RP
27.	90-41421	Cover-bridge-Talon 9500i/12500i RP
28.	90-41422	Wiring assy-Talon 9500i/12500i RP
29.	90-24553	Cable assy-ground-Talon RP
30.	90-24554	Cable assy-power-Talon RP
	90-32463	Labels-set-Talon 9500 RP
	90-32464	Labels-set-Talon 9500i RP
	90-32465	Labels-set-Talon 12500 RP
	90-32466	Labels-set-Talon 12500i RP
31.	90-32467	Labels-set-Talon 9500sr RP
	90-32468	Labels-set-Talon 9500isr RP
	90-32469	Labels-set-Talon 12500sr RP
	90-32470	Labels-set-Talon 12500isr RP
	90-24555	Hook-3/8clevis latch-Talon 9500/12500 RP
32.	90-24556	Hook-1/2clevis latch-Talon 14/18 RP
33.	90-24557	Hardware kit-Talon 9500/12500 RP
34.	90-32471	Handheld remote-Talon series RP
35.	90-32456	Tie rod-engraved-pr-Talon 9500/12500 RP
36.	90-32457	Tie rod-round-Talon 9500/12500 RP
37.	90-32472	Handsaver-blue with logo-Talon series RP
38.	90-32473	Roller fairlead assy-Talon series
39.	90-24507	Hawse-aluminum-superwinch logo
40.	90-12908	Gasket-motor-Talon RP



TALON 14, 18

1.	90-41409	Motor-Talon 9.5 14 12v
	90-41410	Motor-Talon 9.5 14 24v
	90-41411	Motor-Talon 12.5 18 12v
	90-41412	Motor-Talon 12.5 18 24v
	90-24590	Brush assy-12v Talon mtr non-n
	90-24591	Brush assy-24v Talon mtr/12v begin w/n
2.	90-41423	Drum support-motor-Talon 14/18 RP
3.	90-41424	Drum support-gearbox-Talon 14/18 RP
4.	90-24558	Drum bushing-pair-Talon 14/18 RP
5.	90-24559	Lip seal-drum-pair-Talon 14/18 RP
6.	90-41425	Drum assy-Talon 14/18 RP
7.	90-24544	Coupling-ds-motor-Talon 9500/12500
8.	90-24560	Driveshaft-Talon 14/18 RP
9.	90-24570	Coupling-ds-gbox-Talon 14/18 RP
10.	90-41426	Gearbox-internal-Talon 14/18 RP
11.	90-24569	Freespool knob assy-Talon 14/18 RP
12.	90-41427	Gearbox-housing assy-Talon 14/18 RP
13.	90-24561	Shaft-sun-stage2-Talon 14/18 RP
14.	90-24562	Shaft-sun-stage1-Talon 14/18 RP

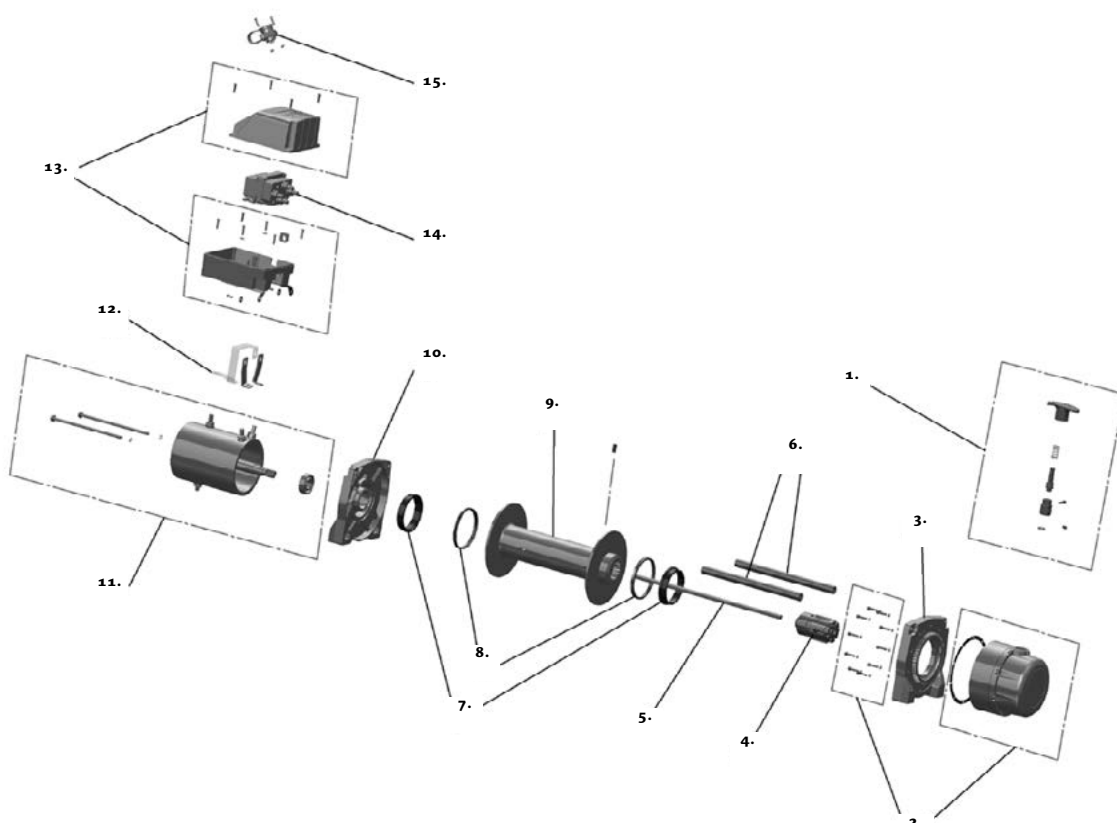
15.	90-32478	Brake assembly-Talon 14/18 RP
16.	90-12897	Screw-set-wire rope-Talon RP
17.	90-24563	Wire rope assy-Talon 14/18 RP
18.	90-24564	Assy-synthetic winch rope 1/2
19.	90-41419	Solenoid box assy-Talon series RP
20.	90-24551	Socket assy-Talon winches RP
	90-24552	Relay assy-dual-12v-Talon series RP
21.	90-24566	Relay assy-dual-Talon 9500/12500 24
	90-32459	Solenoid assembly-Talon series 12v RP
22.	90-32483	Solenoid assembly-Talon series 24
23.	90-32460	Buss bars-set-Talon series RP
29.	90-24553	Cable assy-ground-Talon RP
30.	90-24554	Cable assy-power-Talon RP
	90-32474	Labels-set-Talon 14 RP
	90-32475	Labels-set-Talon 14sr RP
31.	90-32476	Labels-set-Talon 18sr RP
	90-32477	Brake assembly-Talon 14/18 RP
	90-24567	Hook-half link with latch-Talon 14 18 SR
32.	90-24557	Hardware kit-Talon 9500/12500 RP
33.	90-24565	Hardware kit-Talon 14/18 RP
34.	90-32471	Handheld remote-Talon series RP
35.	90-32479	Tie rod-engraved-pr-Talon14/18 RP
36.	90-32480	Tie rod-round-Talon 14/18 RP
37.	90-32472	Handsaver-blue with logo-Talon series RP
38.	90-32473	Roller fairlead assy-Talon series
39.	90-24507	Hawse-aluminum-superwinch logo
40.	90-12908	Gasket-motor-Talon RP



TIGER SHARK 9500, 1150

1.	90-24571	Freespool knob assy-Tiger Shark 9
2.	90-41432	Gearbox assy-Tiger Shark 9500/11500
3.	90-41433	Drum support-gearbox-Tiger Shark
4.	90-32512	Brake assy-Tiger Shark SM-sr-RP
5.	90-24596	Drive shaft-Tiger Shark SM-sr-RP
6.	90-32488	Tie bars-pair-Tiger Shark 9500/11500
7.	90-14521	Drum bushing-pair-Tiger Shark 9500
8.	90-14520	Drum seal-pair-Tiger Shark 9500/11500
9.	90-42639	Drum assy-Tiger Shark SM-sr-RP
10.	90-42638	Drum support-Tiger Shark SM-sr-RP
11.	90-32513 TS 9500 SR i 9500	Motor assy-ts-sr-9500
	90-32514 TS 1150 SR i 11500	Motor assy-ts-sr-11500
12.	90-32491	Buss bars set-Tiger Shark 9500/11500
13.	90-41436	Solenoid box assy-Tiger Shark 9500
14.	90-32492	Solenoid assy-Tiger Shark 9500/11500

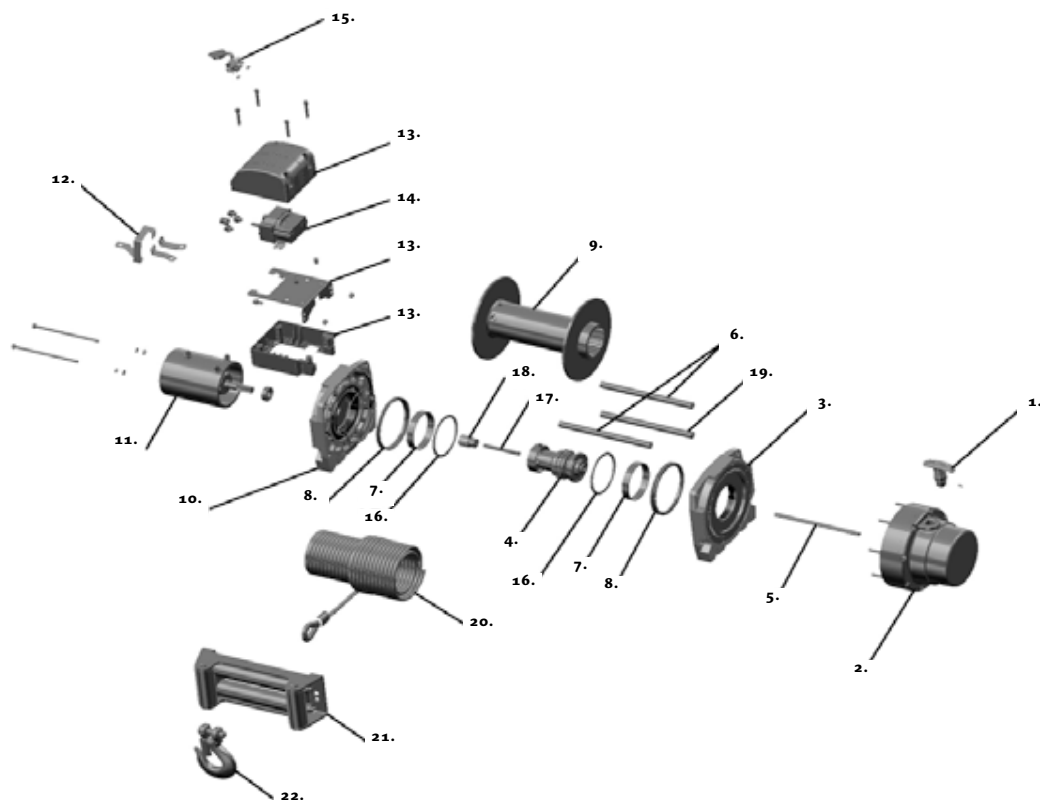
	90-24573	Socket assy-Tiger Shark 9500/11500 RP
	90-32493	Roller fairlead-Tiger Shark 9500/11500
	90-24507-01	Hawse-aluminum-no finish w-logo
	90-24574	Hardware kit-Tiger Shark 9500/11500
	90-24595	Assy-synthetic winch rope-tss
	90-24575	Wire rope assy-Tiger Shark 9500 RP
	90-24576	Wire rope assy-Tiger Shark 11500 RP
	90-24555	Hook-3/8clevis latch-Talon 9500/11500 RP
15.	90-24578	Cable assy-pair-Tiger Shark 9500 RP
	90-22860	Circuit breaker assy (x3-m3)
	90-22147	Circuit breaker assy x9-12v SP
	90-32494	Handheld remote-Tiger Shark 9500/11500
	87-31120	Handsaver-nylon cord
	90-32515	Label kit Tiger Shark 9500 SR
	90-32516	Label kit Tiger Shark 11500 SR
	90-32495	Label kit-Tiger Shark 9500 RP
	90-32496	Label kit-Tiger Shark 11500 RP



TIGER SHARK 13500, 15500, 17500

1.	90-24579	Freespool knob assy-Tiger Shark l
2.	90-41437	Gearbox assy-Tiger Shark lg
3.	90-41438	Drum support-gearbox-ts lg RP
4.	90-32497	Brake assy-Tiger Shark lg RP
5.	90-24580	Driveshaft-gb side-Tiger Shark lg r
6.	90-32498	Tie bar-pair-Tiger Shark lg RP
7.	90-14522	Drum bushing-pair-Tiger Shark lg r
8.	90-14523	Drum seals-pair-Tiger Shark lg RP
9.	90-41439	Drum assy-Tiger Shark lg RP
10.	90-41440	Drum support-motor-ts lg RP
	90-32499	Motor assy-Tiger Shark 13500 RP
11.	90-32500	Motor assy-Tiger Shark 15500 RP
	90-32501	Motor assy-Tiger Shark 17500 RP
12.	90-32502	Motor cables-short-set-ts lg RP
13.	90-41441	Solenoid box assy-Tiger Shark lg r
14.	90-32503	Solenoid assy-Tiger Shark lg RP
15.	90-24581	Socket assy-Tiger Shark lg RP

16.	90-14524	Thrust washer-pr-Tiger Shark lg r
17.	90-24582	Driveshaft-motor side-Tiger Shark
18.	90-24583	Motor coupling-Tiger Shark lg RP
19.	90-32504	Tie bar-lower-Tiger Shark lg RP
	90-24584	Wire rope assy-Tiger Shark 13500 RP
20.	90-24585	Wire rope assy-Tiger Shark 15500 RP
	90-24586	Wire rope assembly 17,500
21.	90-32505	Roller fairlead-Tiger Shark lg RP
22.	90-24587	Hook
	90-24588	Hardware kit-Tiger Shark lg RP
	90-24589	Cable assy-pair-Tiger Shark lg RP
	90-32506	Handheld remote-Tiger Shark lg RP
n/s	87-31120	Handsaver-nylon cord
	90-32507	Label kit-Tiger Shark 13500 RP
	90-32508	Label kit-Tiger Shark 15500 RP
	90-32509	Label kit-Tiger Shark 17500 RP

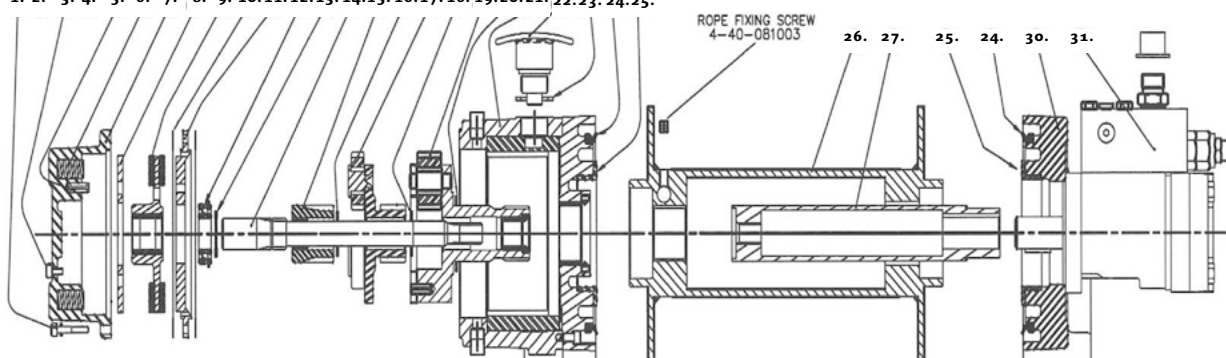


H8, H10

1.	4-36-0603022	Setscrew, m6 x 30 cap head
2.	4-51-0623	Washer-spring m6
3.	4-36-0601022	Setscrew, m6x10 cap hd screw
4.	4-23-063	Threaded seal, m6 nylite
5.	4-56-802003	Pin-roll
6.	4-31-1403030403	Spring
7.	50-90622-01	Clutch cover assy-std units
	50-25160	Brake housing
8.	10002	Clutch plate
9.	10028	Plate-friction bonded
10.	10063	Gasket-h8/10p clutch cover
11.	50-95074	Bearing plate-carrier kit h8p
12.		Spare part
13.	4-26-2517123	Circlip
14.	50-50056	Shaft-drive
15.	50-54013	Gear-sun-primary
16.	10006	Washer-thrust
17.	10061	Carrier assy-1st stage

19.	10011	Carrier assy-2nd stage
20.	10051	Washer-thrust
21.	50-90547	Gear housing assy
	10076	Freespool assy-h8/h30 manual
22.	5603	Clutch assy-airPneumatic release
	10280	Plug-freespool
23.	10295	Washer
24.	4-22-140161123	Seal-v-ring
25.	10049	Washer
	50-90010	Drum-std
26.	50-90011	Drum-long
	50-90003	Rope drum assy
	50-90014	Coupling-tube ass'y-std drum
27.	50-90015	Coupling-tube-long
30.	50-90424	Motor support assy
31.	50-90433	Motor assy
	50-52006	Tie bar-std drum 190 mm
n/s	50-52007	Tie bar-long drum 253 mm

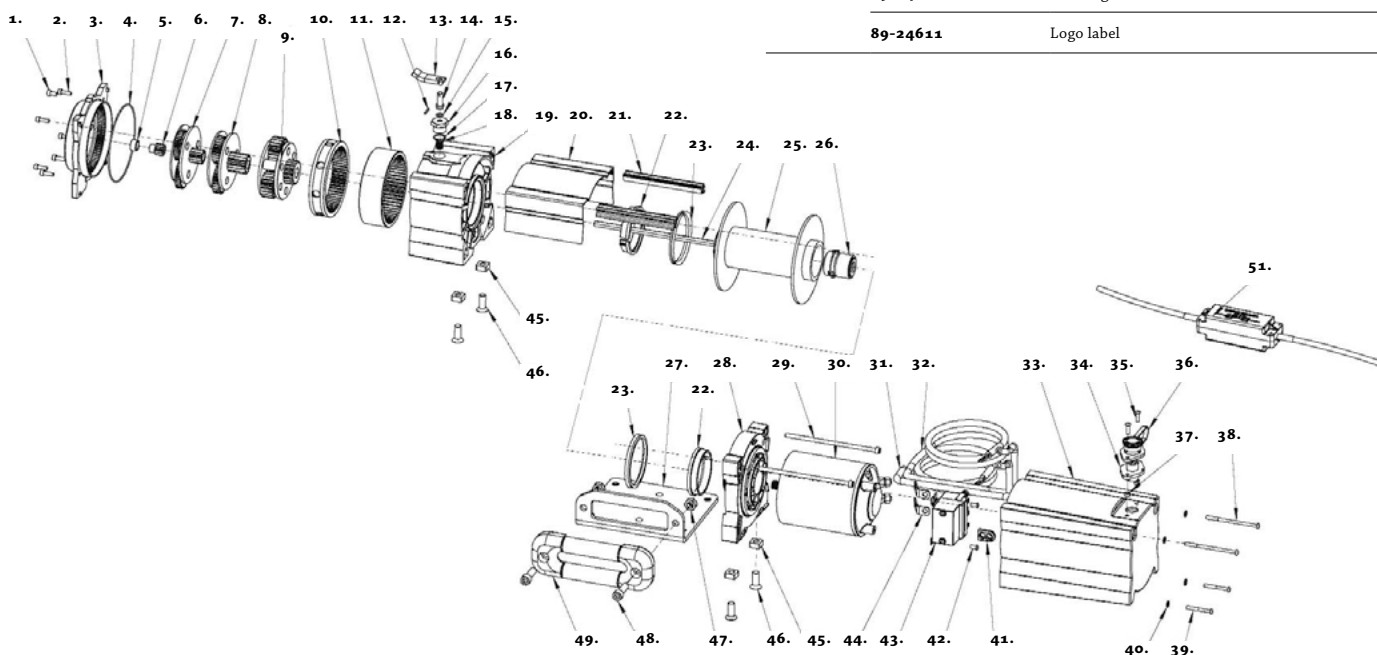
1.-2. 3.-4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 16. 19. 20. 21. 22. 23. 24. 25.



S5500, S7500

1.	89-23258-13	Gearbox screw - short
2.	89-23258-14	Gearbox screw - long
3.	89-42674	Cover-gearbox-s55/7500
4.	89-23320-15	O-ring s55/7500 gearbox
5.	SEE ITEM #3	Bearing - sungear
6.	89-24629	Gear-sun-1st stage-s55/7500
7.	89-30161	Planet carrier-1st stage-s5500
8.	89-30163	Planet carrier-2nd stage-s5500
	89-30164	Planet carrier-2nd stage-s7500
9.	89-30165	Planet carrier-3rd stage-s55/7500
10.	89-30166	Gear-ring-2nd stage-s5500
	89-30167	Gear-ring-2nd stage-s7500
11.	89-30168	Gear-ring-3rd stage-s55/7500
12.13.14. 15.16.17.18.	89-30154	Freespool assy-s55/7500
19.	89-42675	Housing-gearbox-s55/7500
20.	89-30155	Cover-drum-s55/7500
21.	89-24604	Tie bar-s55/7500
22.	89-24605	Bushing-drum-s55/7500
23.	89-24606	Seal-lip-s55/7500
24.	89-24607	Shaft-drive-s55/7500
	89-42676	Drum assembly
25.	89-42677	Drum assembly
26.	89-30160	Brake assembly
27.	89-30156	Baseplate
28.	89-42679	Motor side drum support
29.	89-29258-15	Screw-housing assembly
	89-30158	Motor assembly 12 v
30.	89-24630	Motor assembly 24 v

31.32.	89-24609	Leadwire set
33.	89-42680	Motor cover
34.35.36.37	90-25048-01	Socket assembly
38.	89-23266-04	Cover screws long
39.	89-23266-05	Cover screws short
40.	89-23320-16	O-ring - cover
41.	89-14534	Grommet - leadwires
42.	89-23266-08	Screw - solenoid mounting
	98-10880	Solenoid
43.	89-10917	Solenoid
44.	89-14533	Buss bar
45.	89-23084-08	Square nut - mounting
46.	89-23056-17	Winch mounting screw flathead
47.	89-23073-14	Nut - fairlead mounting
48.	89-23258-16	Screw - fairlead mounting
49.	89-42678	Fairlead assembly
50.	89-30157	Circuit breaker cover assembly
	89-24608-01	Circuit breaker assembly 12 v
51.	89-24608-02	Circuit breaker assembly 24 v
	89-24639	Wire rope assembly
	89-24640	Wire rope assembly
	89-24641	Synthetic rope assembly
	89-24642	Synthetic rope assembly
	89-24613	Hook
	90-24577	Hook
n/s	89-42581	Handheld controller
	89-24610-01	Product label
	89-24610-02	Product label
	89-24610-03	Product label
	89-24610-04	Product label
	89-24612	Warning label
	89-24611	Logo label



NOTES



PROTRAILER Polska Sp.z o.o.

ul. Bytomska 49 | 42-674 Karchowice | Polska

Tel.: +48 798 180 089

+48 788 005 751

+48 503 773 283